

IMPORTANT: PLEASE RETAIN THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE



2005 CHRYSLER 300C LOWER MESH VENT COVERS INSTALLATION INSTRUCTIONS C 03 G5

Part # 1099-010W-05

Quantity	Description	Part No.
1 Set	Lower Mesh Vent Covers (Include)	1099-010W-05
	Lower Mesh Inserts	Right 1099-0054-05 Left 1099-0055-05
	Lower Mesh Mounting Frames	Right 1099-0056-05 Left 1099-0057-05
	Lower Mesh Frame Covers	Right 1099-0058-05 Left 1099-0059-05
1	Hardware Kit (components listed below)	1099-0060-05
4	3/4" No.6 Countersunk Phillips Screws	3999-9063-00
44	.040" x 1/2" Double Faced Tape	3004-9248-92

IMPORTANT!

The exposed edges of the stainless steel grille and mesh can be extremely sharp. Please handle with care.

WARRANTY INFORMATION:

ESG Classics, Inc. warrants its chrome parts and products to be free from defects in material, workmanship or finish for Thirty-Six (36) months from the date of shipment by ESG. This warranty is limited to the repair or replacement, at ESG Classics option, of the defective part or product.

To obtain performance under this warranty you must:

- 1.) Present your ESG unit to an authorized distributor in your area with proof of purchase.
- 2.) If no distributor is available, contact ESG Classics (address below) for authorization to return unit.
- 3.) Returns - All unauthorized returns will be refused. Merchandise approved by ESG for return must have been purchased within the Thirty-Six (36) months. All returns require an authorization number obtained from ESG and the actual return must be accompanied by the written authorization form filled out completely. All merchandise must be inspected upon receipt and shortages reported within 48 hours. All merchandise must be in a resalable condition. Merchandise must be packed carefully in the original packaging. If original packaging is no longer usable, (eg: tennis) comparable to original manner. All returns are subject to a 25% handling charge. Special order items are not returnable. Defective merchandise must have an explanation of the problem. No credit will be issued unless invoice number and date of purchase has been supplied. Manufacturer shall be the sole judge of defects in a product.
- 4.) UPS accounts - All returns must be prepaid. Do not send return shipments, freight collect. Once ESG has made its decision and it is a claim against our warranty policy, ESG will credit the incoming freight on damaged parts.
- 5.) No discontinued part or parts changed due to body style are returnable.


For Return Authorization, write or telephone: ESG Classics, Inc., 8910 McCaw Court, Columbia, MD 21045 (410) 381-4900 Attn: Return Department

You are responsible for inspecting all packages containing ESG Classics' parts and product immediately upon their receipt and must file a claim with the carrier for any damage disclosure by such inspection and notify ESG Classics in writing at the above address of any such damage. This warranty does not extend to any of our products which have been subject to misuse, neglect, accident or have been altered or repaired in any way. This warranty does not cover any accidental or consequential damages for any breach of this Warranty agreement. ESG Classics shall have no responsibility for any loss of time, inconvenience, commercial loss or consequential damage. We shall ESG be liable for any injury or damage to persons or property by reason of any defect in material, workmanship or finish of its parts or products. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.

Notes to the Technician:

ESG is proud to present this package to you and reminds you that for technical information, contact Lynn Eash or Lee Clary at 410-381-4900. Do not attempt installation any ESG product without first reading the detailed instructions. ESG Classics will not warrant damaged parts or vehicle due to altered installation instructions.


Copyright © 2005 by ESG Classics, Inc. All right reserved. The reproduction or utilization of this work in any form or any electronic, mechanical, or other means, no known or hereafter invented, including xerography, photocopying, and recording, and in any information storage retrieval system is forbidden without written permission of owners.

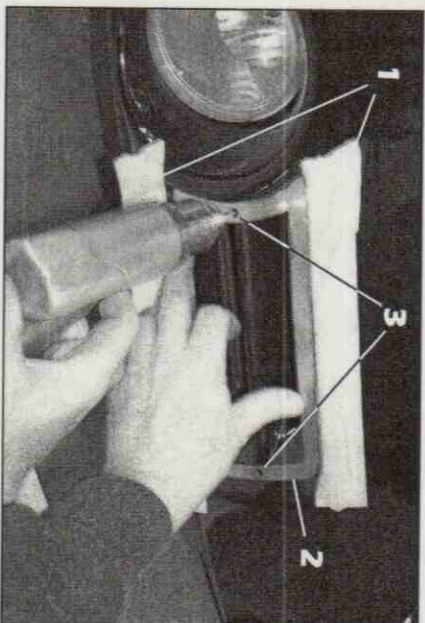


1. Apply masking tape around the cooling duct openings.
2. Align the mesh sections and frames into the front bumper cooling ducts.
3. Use a 1/16" drill bit to drill through the exact center of the mounting holes.



4. Install the supplied 3/4" no.6 countersunk phillips screws into the holes, making sure that the screws are as flush as possible with the mounting frames. **DO NOT OVERTIGHTEN THE SCREWS OR YOU WILL STRIP OUT THE HOLES!**

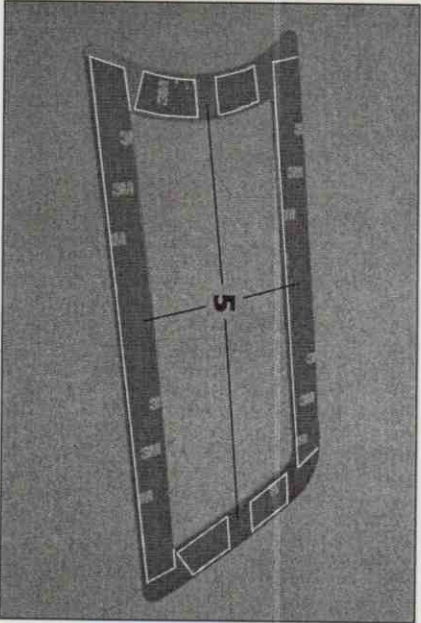

5. Wipe the face of the mounting frames and the back of the covers with alcohol to remove grease and finger prints. Make sure not to apply the double faced tape where the screw heads are located. This will help keep the cover down as tight as possible on the frame.

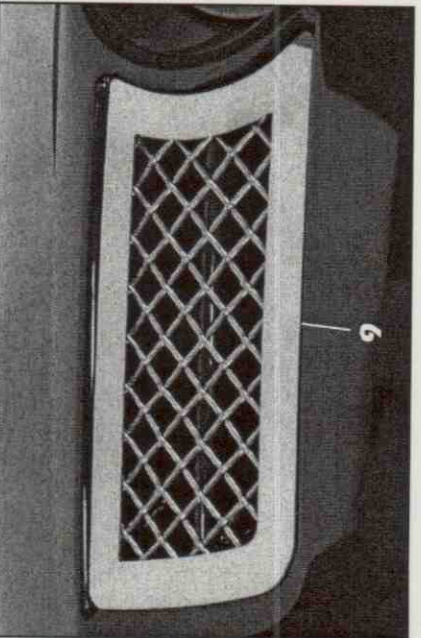

6. Peel off the double faced tape backing and carefully align the cover onto the frames and press firmly into place to finish.